


SEWER MAINS - 10' OR LESS COVER

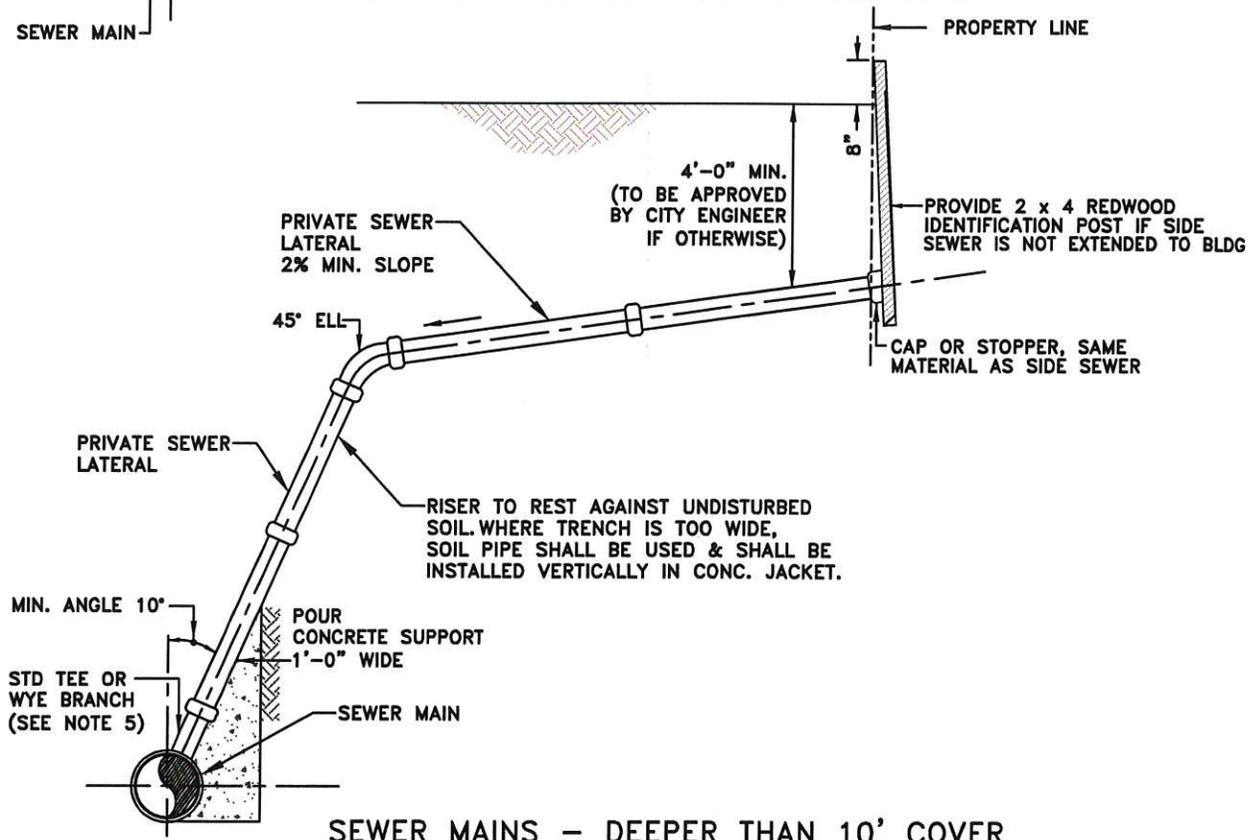

SEWER MAINS - DEEPER THAN 10' COVER

NOTES:

1. SEE STD DWG SS-10 FOR SEWER CLEANOUT AND EXTENSION BEYOND PROPERTY LINE.
2. LOCATION OF SEWER LATERAL SHALL HAVE AT LEAST 12" VERTICAL AND HORIZONTAL CLEAR SEPARATION FROM ANY WATER SERVICE.
3. MATERIAL FOR SEWER LATERAL SHALL BE PVC, HDPE OR DIP. SEE STANDARD SPECIFICATION FOR MATERIAL REQUIREMENT.
4. INSTALLATION METHOD:
 - a. PVC, SDR 35, SDR 26 OR DIP - INSTALLED IN TRENCH
 - b. HDPE (SDR 17 & 11) - TRENCHLESS (PIPE BURSTING)
5. SEE STD DWG SS-6 FOR CONNECTION TO SEWER MAIN LARGER THAN 12 INCHES.
6. SPACE BETWEEN 2 ADJACENT TAPS SHALL BE AT LEAST 24 INCHES.
7. WHERE THE EXISTING SEWER SERVICE IS USED FOR NEW BUILDING, THE EXISTING SEWER SERVICE SHALL BE TELEVIEWED TO DETERMINE ITS INTEGRITY AND ADEQUACY TO SERVICE THE PROPERTY. THE VIDEO FILMING SHALL BE PERFORMED IN THE PRESENCE OF A DWWR REPRESENTATIVE AND A COPY OF THE FILM SHALL BE PROVIDED TO THE DWWR.



CITY OF DALY CITY, CALIFORNIA
NORTH SAN MATEO COUNTY SANITATION DISTRICT

STANDARD
DETAIL

SEWER LATERAL

SS-5

REVIEWED BY:

[Signature]
DWWR DIRECTOR

ADOPTED ON:

JAN 14, 2019
BOARD OF DIRECTORS

DATE: NOV 2018