


DETAIL A

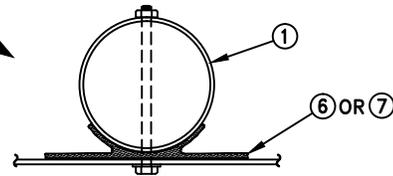


LEGEND:

- ① 2" I.D. GALVANIZED STEEL PIPE, SCHEDULE 40.
- ② 5/16"Ø x 8" LONG STEEL BAR INSERTED THROUGH THE DRILLED HOLE IN THE PIPE.
- ③ 3M HIGH INTENSITY PRISMATIC REFLECTIVE SHEETING OR APPROVED EQUAL. ALL PARKING SIGNS MOUNTED ON LIGHT POLES TO BE DOUBLE SIDED WITH BANDING MOUNT, BAND TO BE TAPCO PART NO. C206/3930-SS. BUCKLE TO BE TAPCO PART NO. C256/3465-SS OR APPROVED EQUAL. USE 2 BUCKLES PER SIGN.
- ④ SIGN SADDLE, TAPCO NO.M2G-FUB OR APPROVED EQUAL.
- ⑤ TAPCO ALUMINUM L-BRACKET NO. M2G-2LBT-FS OR APPROVED EQUAL.
- ⑥ TAPCO CLAMP NO. M2G-S2S WITH 5/16"Øx3" LONG BOLTS , 5/16" TUFF TORQ HEX NUT AND 1 1/2"Ø WASHER OR APPROVED EQUAL.
- ⑦ TAPCO CLAMP NO. M2G-S2S WITH 5/16"Øx3" LONG BOLTS , 5/16" TUFF TORQ HEX NUT AND 7/8"Ø WASHER OR APPROVED EQUAL.
- ⑧ HIGH INTENSITY PRISMATIC REFLECTIVE R1-1 30"x30"

NOTE:

PRIOR TO ORDERING THE STREET SIGNS, VERIFY WITH THE CITY ENGINEER THE EXACT LOCATION AND SIZE. MINIMUM 60" NEW/48" EXISTING PEDESTRIAN ACCESS MUST BE MAINTAINED AT ALL TIME.

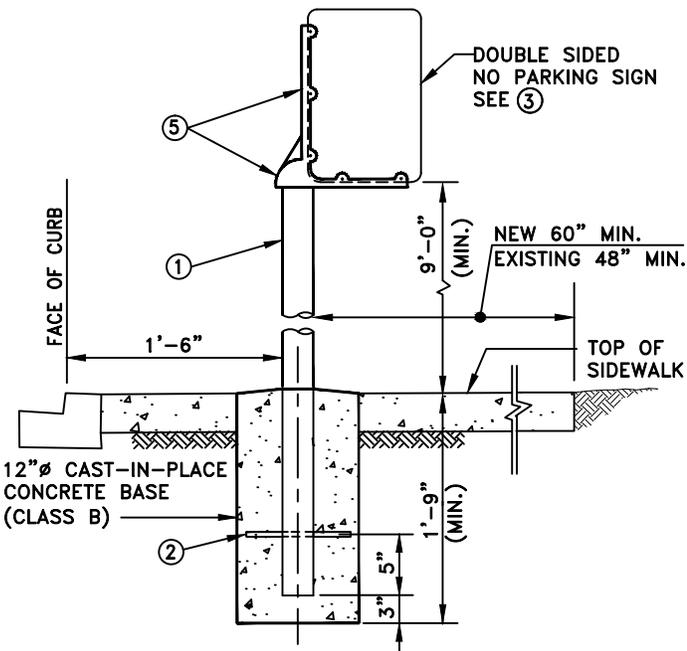

DETAIL B



CITY OF DALY CITY, CALIFORNIA
DEPARTMENT OF PUBLIC WORKS

TRAFFIC SIGNS FABRICATION AND INSTALLATION

REVIEWED BY: *Richard Chao*
CITY ENGINEER

ADOPTED ON: DEC 10, 2018
CITY COUNCIL

STANDARD
DETAIL

S-10

DATE: NOV 2018