


INTERSTATE KC500
CANTILEVER ARM
OR EQUAL

SIGN BRACKET
FOR TRAFFIC SIGNAL
OR STREET LIGHT POLE

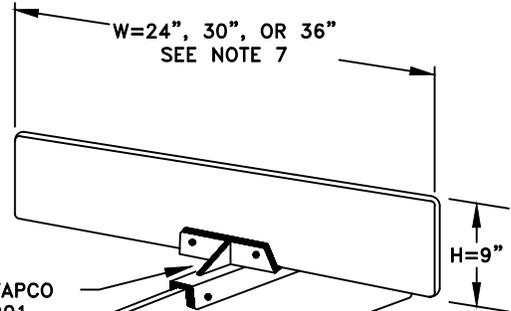

CROSS PIECE, TAPCO
V14F-HDSL105901
OR EQUAL

CAP, TAPCO
V14F-HDSL1072C1
OR EQUAL

2" I.D. GALVANIZED
STEEL PIPE

12"Ø DIAMETER
CAST-IN-PLACE
CONCRETE BASE
(CLASS B)


5/16"ØX8" LONG STEEL
ROD INSERTED THROUGH
BORED HOLE IN PIPE
POST

9'-0"

1'-9" MIN.
FOOTING

NOTES:

1. PROVIDE SINGLE 9" PLATE FOR EACH STREET NAME.
2. EACH PLATE SHALL BE DOUBLE-FACED 0.125" THICK ALUMINUM.
3. SIGN BACKGROUND MATERIAL SHALL BE 3M SCOTCHLITE WHITE REFLECTIVE SHEETING, DIAMOND GRADE VIP, OR APPROVED EQUAL. LETTER MATERIAL SHALL BE SERIES 1170 3M SCOTCHLITE ELECTRONIC CUTTABLE FILM, TRANSLUCENT PRESSURE SENSITIVE 1175 BLUE, OR EQUAL. SEAGULL SYMBOL SHALL BE INCLUDED ON TOP OF EACH SIGN. LETTER FONT SHALL BE UNIVERS 57.
4. HARDWARE SLOTS MUST BE REAMED TO 0.164 TO FIT DOUBLE FACE SIGN.
5. ALL SIGN POSTS SHALL BE 2" I.D. GALVANIZED STEEL PIPE, SCHEDULE 40.
6. SEE STD. DWG S-8 FOR TYPICAL SIGN FABRICATION AND LOCATION.
7. SMALLEST SIGN SIZE (24") SHALL BE USE WHENEVER FEASIBLE. LARGER SIZES TO BE USED ONLY WHERE LENGTH OF STREET NAME REQUIRES.

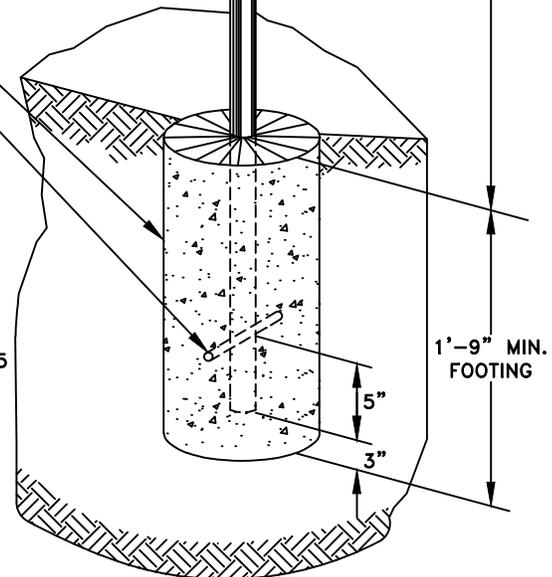

CITY OF DALY CITY, CALIFORNIA
DEPARTMENT OF PUBLIC WORKS

STANDARD
DETAIL

STREET NAME SIGN CONSTRUCTION

S-9

REVIEWED BY: *Richard Chad G.*
CITY ENGINEER

ADOPTED ON: DEC 10, 2018
CITY COUNCIL

DATE: NOV 2018