


# Vista Grande Drainage Basin Alternatives Analysis

## *Alternatives Evaluation Report (Draft)*

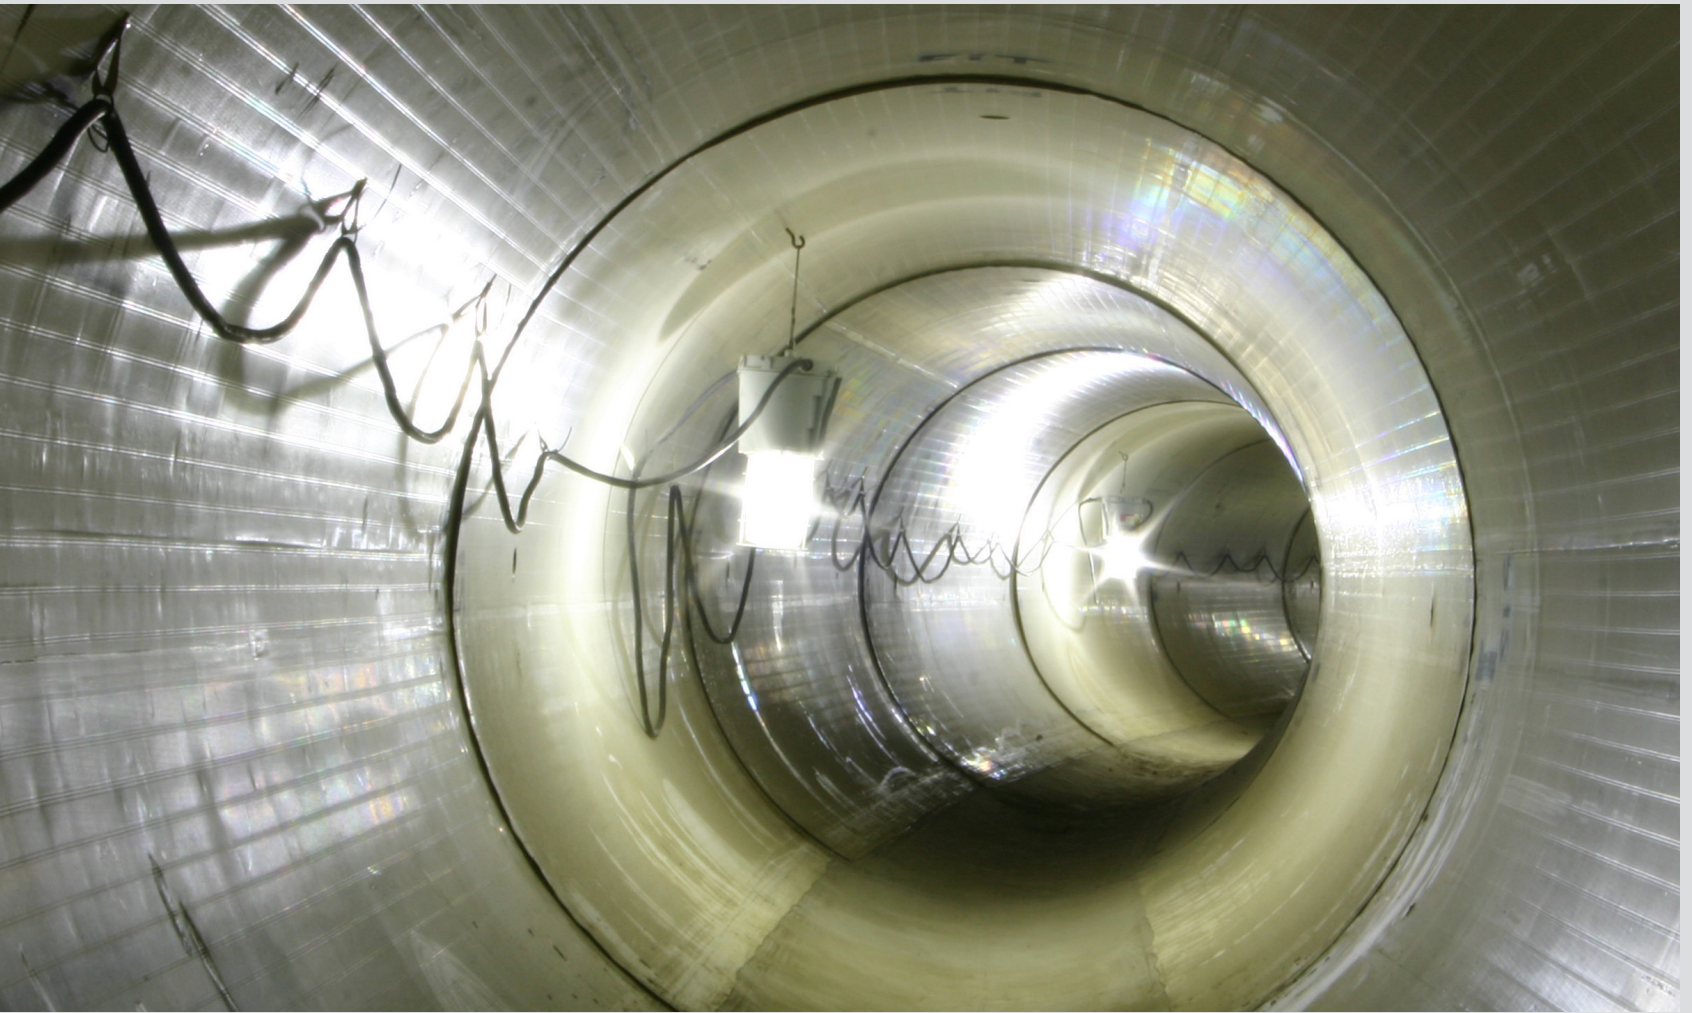

Prepared by:

December 12, 2007

**JACOBS ASSOCIATES**

Engineers/Consultants  
465 California Street, Suite 1000  
San Francisco, CA 94104

# Vista Grande Drainage Basin Alternatives Analysis

## **Alternatives Evaluation Report (Draft)**

Revision 02  
December 12, 2007



Prepared by:



Jacobs Associates  
465 California Street, Suite 1000  
San Francisco, CA 94104

# Distribution

To:	Pat Martel City of Daly City	
	Patrick Sweetland City of Daly City	
	Robert Ovidia City of Daly City	
From:	Blake Rothfuss Jacobs Associates	
Prepared By:	Blake Rothfuss Jacobs Associates	Glenn Boyce Jacobs Associates
	Erin Hohenshelt Jacobs Associates	Jennifer Allen Jacobs Associates
	Sue Bednarz Jacobs Associates	Mark Havecost Jacobs Associates
	Bill Faisst Brown and Caldwell	Meng Siew Brown and Caldwell
	Eric Zigas ESA	Darcey Rosenblatt ESA
	Erin Higbee ESA	
Reviewed By:	Steve Klein Jacobs Associates	

# Table of Contents

<b>1</b>	<b>Executive Summary .....</b>	<b>1</b>
<b>2</b>	<b>Introduction .....</b>	<b>3</b>
2.1	Purpose .....	3
2.2	Project Background.....	3
2.3	Previous Studies .....	4
2.4	Ongoing Studies.....	4
2.5	Acknowledgements .....	5
2.6	Limitations .....	5
<b>3</b>	<b>Watershed Hydrology and System Hydraulics.....</b>	<b>6</b>
3.1	Watershed Description.....	6
3.2	Preliminary Design Criteria .....	6
3.3	Preliminary Hydrologic Evaluation .....	7
3.4	Water Quality Improvements .....	7
<b>4</b>	<b>Description of Alternatives .....</b>	<b>9</b>
4.1	Alternative 1A – Beginning of Canal to New Outfall .....	10
4.2	Alternative 4 – South of County Line along Northgate Drive .....	11
4.3	Alternative 5B – 1/3 up Canal to Existing Outfall .....	12
4.4	Alternative 6 – 2/3 up Canal to Existing Outfall .....	13
4.5	Alternative 7 – Parallel Tunnel South of the Existing Tunnel.....	15
4.6	Alternative 9 – Detention Basins.....	16
4.7	Alternative 10 – Stormwater Re-Use Opportunities.....	19
<b>5</b>	<b>Geologic and Geotechnical Assessments.....</b>	<b>21</b>
5.1	Regional and Site Geology .....	21
5.2	Regional Seismicity.....	22
5.3	Geotechnical Literature Research .....	23
5.4	Anticipated Subsurface Conditions at Westlake Park.....	24
5.5	Anticipated Ground Conditions for New Tunnel.....	24
5.6	Recommended Tunneling Methods.....	25
<b>6</b>	<b>Preliminary Assessment of Construction Method and Constructability Issues .....</b>	<b>26</b>
6.1	Construction Approach .....	26
<b>7</b>	<b>Potential Utility Conflicts and Relocation Requirements .....</b>	<b>33</b>
7.1	Electric Utilities.....	33
7.2	Telephone .....	33
7.3	Storm Drains .....	33
7.4	Sanitary Sewer.....	34
7.5	Water Pipelines .....	34
7.6	Natural Gas Pipelines .....	34
<b>8</b>	<b>Preliminary Environmental Considerations.....</b>	<b>35</b>
8.1	Ecological Setting.....	35
8.2	Overview of the Environmental Regulatory Process .....	37
8.3	Agency Consultations .....	38
8.4	Environmental Characterization Assessment of Alternative Tunnel Alignments.....	38
<b>9</b>	<b>Evaluation of Alternatives .....</b>	<b>46</b>

9.1	Review of Findings.....	46
9.2	Screening Methodologies .....	58
9.3	Preliminary Evaluation .....	59
9.4	Sensitivity Analysis.....	60
<b>10</b>	<b>Summary and Recommendations .....</b>	<b>61</b>
10.1	Summary.....	61
10.2	Recommendations .....	61
<b>11</b>	<b>References.....</b>	<b>63</b>
<b>12</b>	<b>Revision Log.....</b>	<b>65</b>

**Appendix A: Tables**

**Appendix B: Figures**

**Appendix C: Conceptual Design Figures**

**Appendix D: Regional Geologic Report**

**Appendix E: Geotechnical Assessment Report**

**Appendix F: Relative Cost Assessment**

# List of Tables

Table 3.1 Volume Distribution  
Table 4.1 Summary of Tunnel Alignment Alternatives Without Stormwater Detention Facilities  
Table 4.2A Hydraulic Analysis Including Stormwater Detention for Alignment Alternatives 1A & 4  
Table 4.2B Hydraulic Analysis Including Stormwater Detention for Alignment Alternatives 5B, 6, & 7  
Table 4.3 Summary of Tunnel Alignment Alternatives with 1,000 cfs diverted to Stormwater Detention Facilities  
Table 5.1 Regional Faults and Seismicity  
Table 5.2 Generalized Categories of Ground Conditions for Soft Ground Tunnels  
Table 9.1 Alternative Evaluation Methodology Framework  
Table 9.2 Combination Descriptions  
Table 9.3 Example Preliminary Evaluation Results  
Table 9.4 Example Weighting Sensitivity Matrix  
Table 10.1 Example Preliminary Alternatives Ranking

# List of Figures

Figure 3.1 Vista Grande Watershed  
Figure 3.2 Vista Grande Synthetic Hydrograph  
Figure 3.3 Watershed Hydraulic Schematic  
Figure 3.4 Debris Screening Device  
Figure 3.5 Inclined Screen  
Figure 3.6A Trash rack and Trashrake (Courtesy of Atlas-Polar Hydorrake)  
Figure 3.6B Trashrake Conveyor (Courtesy of Atlas-Polar Hydorrake)  
Figure 4.1A Alternative 1A Capacity Schematic  
Figure 4.1B Alternative 1A Drop Box Site  
Figure 4.1C Alternative 1A Tunnel Inlet Site  
Figure 4.2 Alternative 4 Capacity Schematic  
Figure 4.3A Alternative 5B Capacity Schematic  
Figure 4.3B Alternative 5B Tunnel Inlet Site  
Figure 4.3C Alternative 5B Tunnel Construction Staging Area  
Figure 4.4A Alternative 6 Capacity Schematic  
Figure 4.4B Alternative 6 Tunnel Inlet Site  
Figure 4.4C Alternative 6 Tunnel Construction Staging Area  
Figure 4.5A Alternative 7 Capacity Schematic  
Figure 4.5B Alternative 7 Tunnel Inlet Site  
Figure 4.5C Alternative 7 Tunnel Construction Staging Area  
Figure 4.6 Alternative 9 Capacity Schematic  
Figure 4.7 Existing Storm Drain Schematic  
Figure 6.1 Existing Daly City Outfall Structure and Ocean Outfall Pipe  
Figure 6.2 Existing Daly City Outfall Structure and WWTP Pipeline  
Figure 6.3 Typical Tie-back Installation  
Figure 6.4 Soldier Pile Wall with Tie-backs for a 30 MG Water Storage Tank  
Figure 6.5 Water Storage Structure Supports for a 30 MG Water Storage Tank  
Figure 6.6 Water storage tank approximately 50' deep  
Figure 7.1 Typical Overhead Utility Along the Existing Vista Grande Canal  
Figure 7.2 Typical Underground Telecommunication Utility Along the Existing Vista Grande Canal  
Figure 7.3 Typical Department of Public Works Sewer