



TYPICAL CURVED MANHOLE

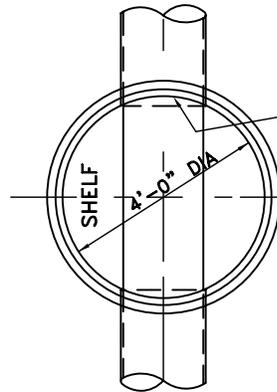


TYPICAL STRAIGHT THROUGH MANHOLE

NOTE:
THE TOP HALF OF THE PVC PIPE SHALL BE REMOVED TO THE CONTOUR OF THE INSIDE OF THE M.H. AND THE BROKEN EDGES SHALL BE PLASTERED SMOOTH WITH CEMENT. -- TYP. FOR ALL MANHOLES

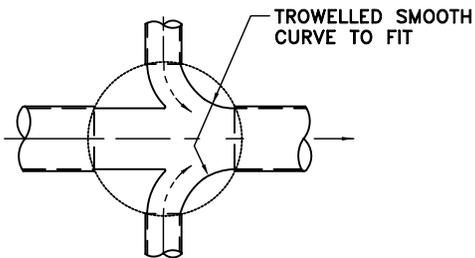


TYP. MANHOLE WITH 2 BRANCHES

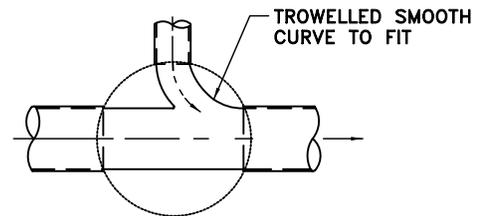


TYP. MANHOLE WITH 1 BRANCH

PLANS-CHANNELIZED M.H. BOTTOMS

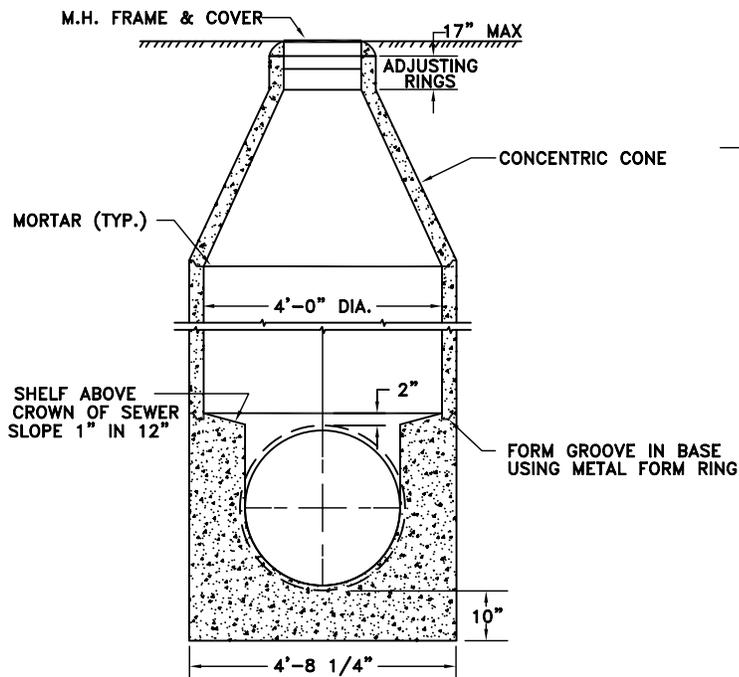

TYPICAL SECTION
BARREL DIAMETERS
VARY (SEE SPECS)

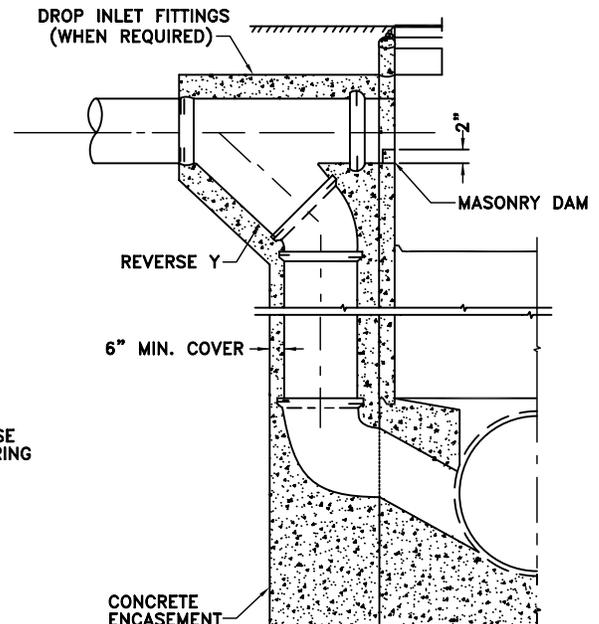

SECTION - WITH DROP INLET
NOTE: PRECAST MANHOLE SECTIONS
SHALL BE FURNISHED WITHOUT
STEPS OR LADDER RUNGS