
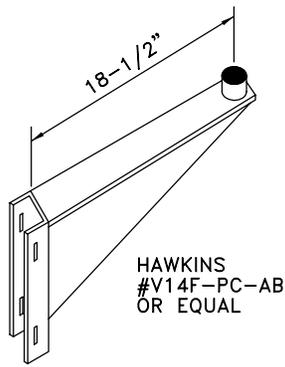


NOTES:

1. PROVIDE SINGLE 9" PLATE FOR EACH STREET NAME.
2. EACH PLATE SHALL BE DOUBLE-FACED 0.125" THICK ALUMINUM.
3. SIGN BACKGROUND MATERIAL SHALL BE 3M SCOTCHLITE WHITE REFLECTIVE SHEETING, DIAMOND GRADE VIP, OR APPROVED EQUAL. LETTER MATERIAL SHALL BE SERIES 1170 3M SCOTCHLITE ELECTRONIC CUTTABLE FILM, TRANSLUCENT PRESSURE SENSITIVE 1175 BLUE, OR EQUAL. SEAGULL SYMBOL SHALL BE INCLUDED ON TOP OF EACH SIGN. LETTER FONT SHALL BE UNIVERSAL 57.
4. HARDWARE SLOTS MUST BE REAMED TO 0.164 TO FIT DOUBLE FACE SIGN.
5. ALL SIGN POSTS SHALL BE 2" I.D. GALVANIZED STEEL PIPE, SCHEDULE 40.
6. SEE STD. DWG S-11 FOR TYPICAL SIGN FABRICATION AND LOCATION.
7. SMALLEST SIGN SIZE (24") SHALL BE USE WHENEVER FEASIBLE. LARGER SIZES TO BE USED ONLY WHERE LENGTH OF STREET NAME REQUIRES.

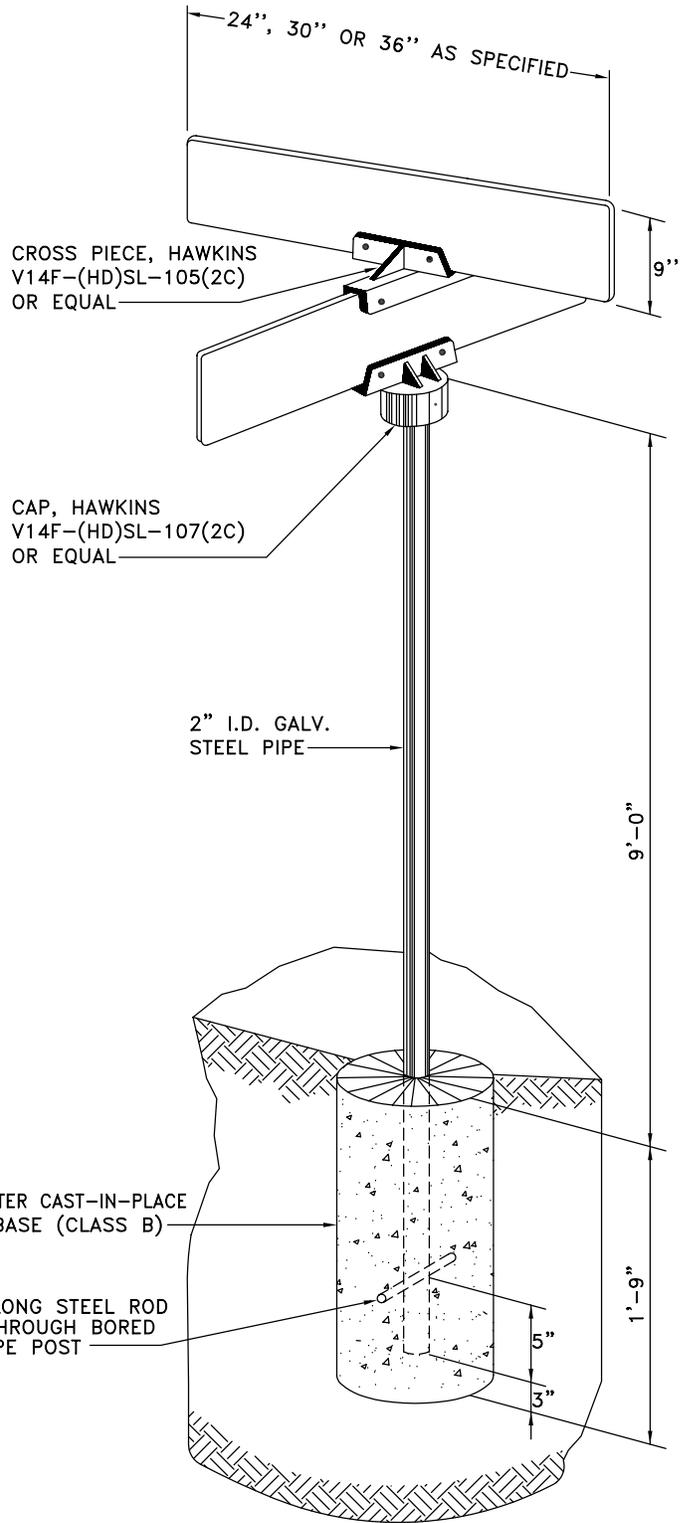

SIGN BRACKET
FOR TRAFFIC SIGNAL
OR STREET LIGHT POLE

1'-0" DIAMETER CAST-IN-PLACE
CONCRETE BASE (CLASS B)

5/16"x8" LONG STEEL ROD
INSERTED THROUGH BORED
HOLE IN PIPE POST

2" I.D. GALV.
STEEL PIPE

CROSS PIECE, HAWKINS
V14F-(HD)SL-105(2C)
OR EQUAL

CAP, HAWKINS
V14F-(HD)SL-107(2C)
OR EQUAL

24", 30" OR 36" AS SPECIFIED

9"

9'-0"

1'-9"

5"
3"