


DETAIL A

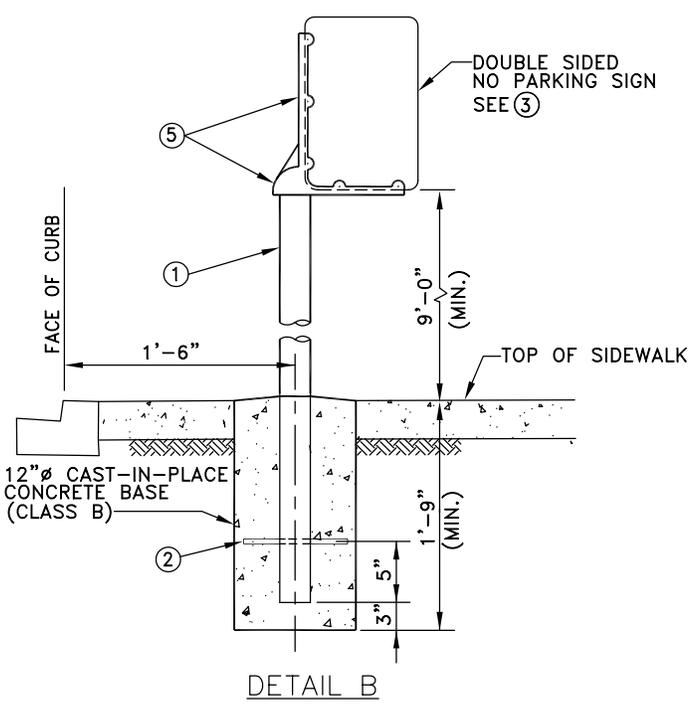

DETAIL B

LEGEND:

- ① 2" I.D. GALVANIZED STEEL PIPE, SCHEDULE 40.
- ② 5/16"Ø x 8" LONG STEEL BAR INSERTED THROUGH THE DRILLED HOLE IN THE PIPE.
- ③ HAWKINS-HAWKINS DOUBLE FACE "ALUMA-SIGNS" (REFLECTORIZED) OR APPROVED EQUAL. ALL PARKING SIGNS TO BE MOUNTED ON LIGHT POLES TO BE DOUBLE SIDED WITH BANDING MOUNT, BAND TO BE HAWKINS PART NO. HPN-127. BUCKLE TO BE HAWKINS PART NO. HPN-128 OR APPROVED EQUAL. USE 2 BUCKLES PER SIGN.
- ④ SIGN SADDLE, HAWKINS NO.M2G-S2S OR APPROVED EQUAL.
- ⑤ HAWKINS-HAWKINS ALUMINUM L-BRACKET NO. M2-2LB OR APPROVED EQUAL.
- ⑥ HAWKINS-HAWKINS CLAMP NO. M2G-S2S WITH 5/16"Øx3" LONG BOLTS , 5/16" TUFF TORQ HEX NUT AND 1 1/2"Ø WASHER OR APPROVED EQUAL.
- ⑦ HAWKINS-HAWKINS CLAMP NO. M2G-S2S WITH 5/16"Øx3" LONG BOLTS , 5/16" TUFF TORQ HEX NUT AND 7/8"Ø WASHER OR APPROVED EQUAL.

NOTE:

PRIOR TO ORDERING THE STREET SIGNS, VERIFY WITH THE ENGINEER THE EXACT LOCATION AND SIZE. MINIMUM 36" PEDESTRIAN ACCESS MUST BE MAINTAINED AT ALL TIME.

CITY OF DALY CITY, CALIFORNIA DEPARTMENT OF PUBLIC WORKS

TYPICAL TRAFFIC SIGNS FABRICATION AND INSTALLATION

DRAWN BY : A. TAN

DATE: 6/03

APPROVED BY: *MP Sharma*, CITY ENGINEER

STANDARD DRAWING NO. S-20

Revised: ANDY TAN
 Date Filed: 05/21/1999
 Standard: S-20.dwg

Time: 11:0:56
 Date: 6/21/1999